


HD SERIES

power beyond the standards



- Enjoy your choice:**
- TocDem HD series increase with a new primary demolition series which is aimed to the professionals who need ever higher performance without sacrificing solidity and ease of use.
- With this new concept, HD brings the following features to the market:
- ability to crush and break down special concrete structures;
 - new cylinders design;
 - new claws optimized for the new function;
 - overall lighter machines;
 - increased strength of the jaw at the tip.

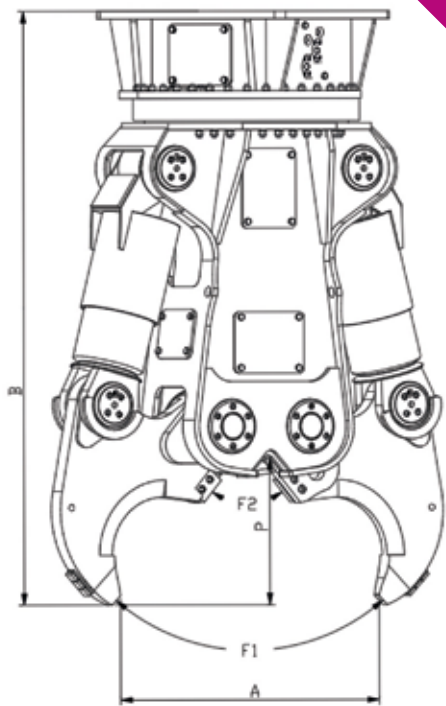

HD SERIES

DEMOLITION CRUSHERS

HD MODEL	U.M.	HD 1000	HD 1500	HD 1800	HD 2000	HD 2500	HD 4000	HD 5000	HD 6000	HD 8000	HD 12000
OPENING (A)	mm	480	660	765	892	1,030	1,260	1,400	1,540	1,700	2,140
	in.	19	26	30	35	41	50	55	61	67	84
LENGTH (B)	mm	1,700	1,740	2,150	2,190	2,235	2,750	2,800	2,920	3,100	3,750
	in.	67	69	85	86	88	108	110	115	122	148
WIDTH (P)	mm	377	378	430	559	565	750	890	980	1,080	1,200
	in.	15	15	17	22	22	30	35	39	43	47
EXCAVATOR WEIGHT	Ton	12/16	16/22	22/30	35/50	35/50	45/60	50/65	60/80	80/100	90/150
	lbs	24,000/32,000	32,000/44,000	44,000/60,000	70,000/100,000	70,000/100,000	80,000/120,000	100,000/130,000	120,000/160,000	160,000/200,000	180,000/300,000
EQUIPMENT WEIGHT	Kg	1,150	1,400	1,900	2,200	2,580	3,800	4,800	5,800	7,900	11,950
	lbs	2,535	3,086	4,189	4,850	5,688	8,378	10,582	12,787	17,416	26,345
OIL PRESSURE	Bar	300	310	320	320	320	340	340	340	340	340
	psi	4,351	4,496	4,641	4,641	4,641	4,931	4,931	4,931	4,931	4,931
OIL CAPACITY	L/min	200/220	220/240	240/280	300/340	300/340	300/380	350/400	380/450	400/500	450/700
	gal/min	53/58	58/63	63/74	79/90	79/90	79/100	92/106	100/119	106/132	119/185
ROTATION OIL PRESSURE	Bar	140	140	140	140	140	140	140	140	140	140
	psi	2,030	2,030	2,030	2,030	2,030	2,030	2,030	2,030	2,030	2,030
ROTATION OIL CAPACITY	L/min	30	30	30	30	30	30	30	30	60	90
	gal/min	8	8	8	8	8	8	16	16	16	24
ROTATION OIL CAPACITY	L/min	15	15	30	30	30	30	30	30	60	60
	gal/min	4	4	8	8	8	8	8	8	16	16
F1	ton	27	57	120	180	180	210	250	310	385	450
F2	ton	57	180	450	695	720	830	995	1,230	1,480	1,680